



# Blackberry Curve 8320 Keyboard Replacement

This guide explains the disassembly of the Blackberry Curve 8320 to replace the keyboard.

Written By: Yegor Pomortsev



## INTRODUCTION

This guide will show you how to:

- Remove the battery
- Remove the front panel
- Replace the keyboard



## TOOLS:


- [iFixit Opening Tools](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Front Panel



- Use a plastic opening tool to gently pry the bottom cover loose.
- ⚠ Do not use excessive force at risk of damaging the antenna, which is under this casing.
- Pull the cover from the front of the phone after the back is loose.

## Step 2

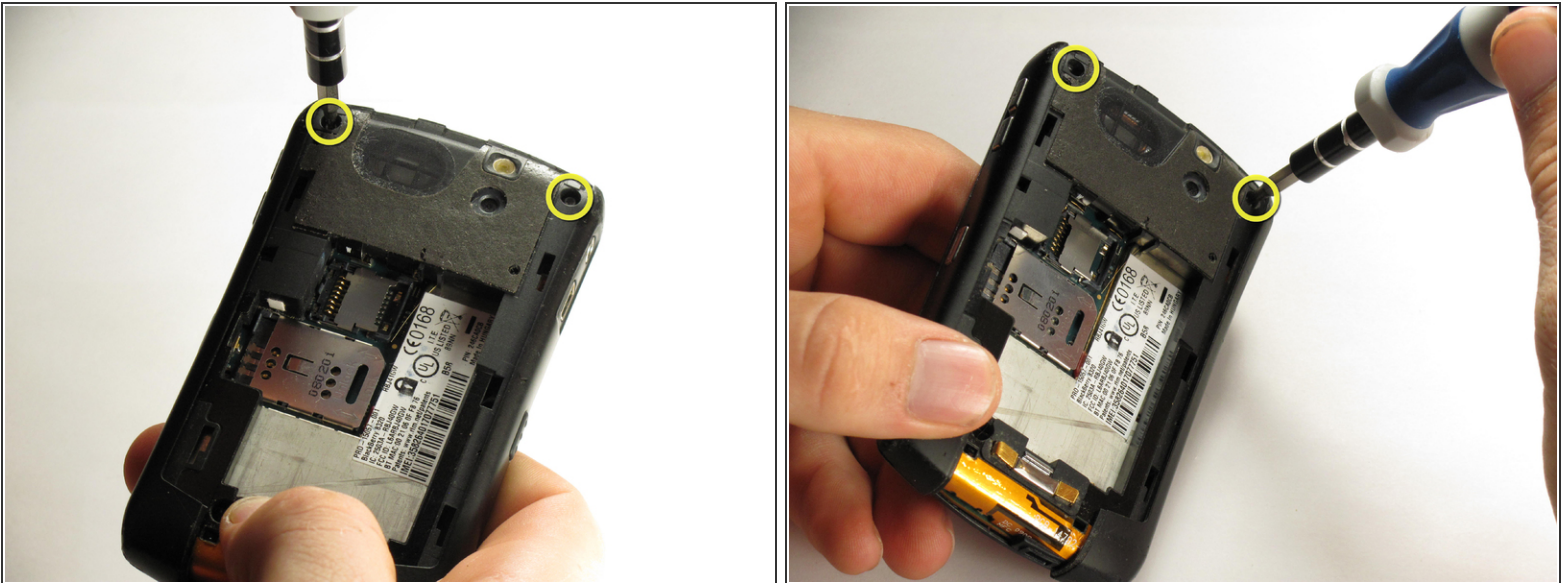


- Remove the two top screws with a T5 Torx screwdriver.

**i** The screws are 8mm long.




## Step 3

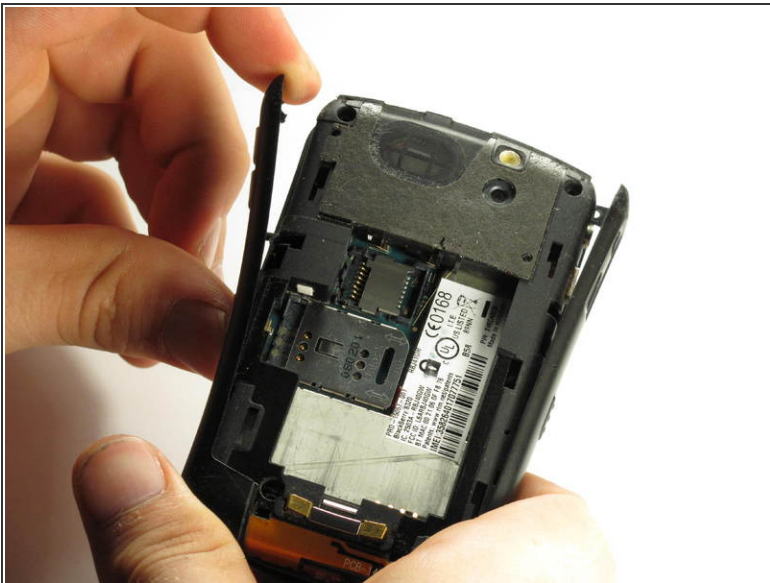

- Gently pry off the top of the side casings.

⚠ The side casings cannot be fully removed yet because they are screwed on at the bottom.

## Step 4

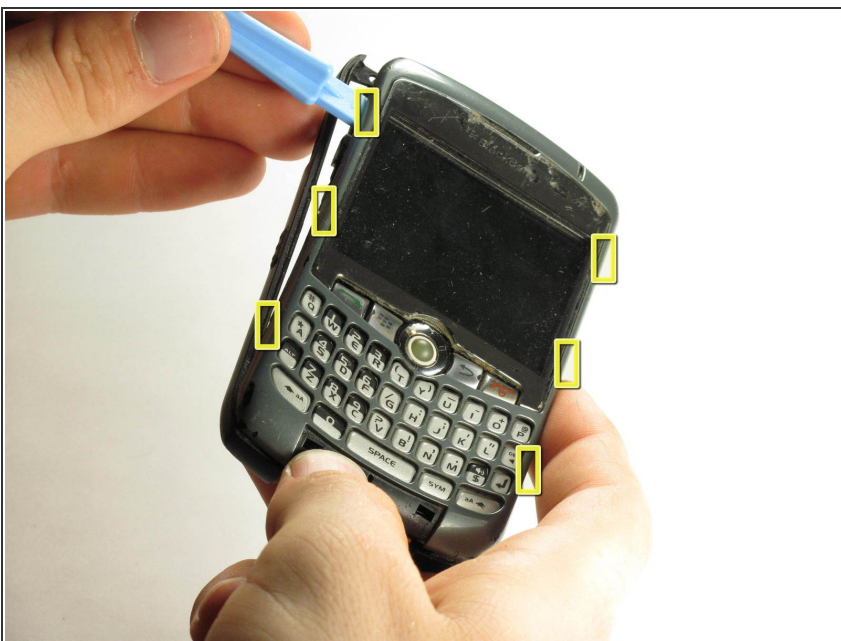

- Use a plastic opening tool to detach the securing clips holding the the front panel in place.

ⓘ There are six securing clips total.

## Step 5



- Remove the front panel.

**i** You may need to apply some force because the front panel is attached to the rest of the device with adhesive.

## Step 6 — Keyboard



- Remove the keyboard.

**!** Be careful not to bend or fold the keyboard, as it can break easily.

To reassemble your device, follow these instructions in reverse order.

